

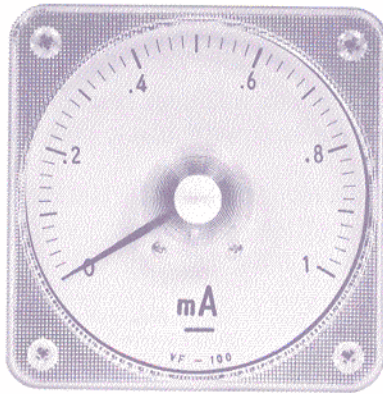


広角度計器 VF SERIES CIRCULAR SCALE SWITCHBOARD INSTRUMENTS

9

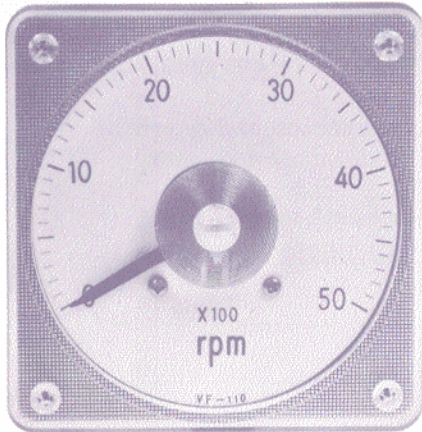


DC AMPERE & VOLTMETER (Moving Coil Type)		
MODEL	RANGE	CLASS
MVF-120	200 μ A ~ 30A	1.5
	30mV~500V	1.5
MVF-110	200 μ A ~ 30A	1.5
	30mV~500V	1.5
MVF-100	200 μ A ~ 20A	2.5
	30mV~300V	2.5
MVF-80	200 μ A ~20A	2.5
	30mV~300V	2.5

AC AMPERE & VOLTMETER (Rectifier Type)		
MODEL	RANGE	CLASS
CVF-120	200 μ A~ 10mA	1.5
	3V ~500V	1.5
CVF-110	200 μ A~ 10mA	1.5
	3V ~500V	1.5
CVF-100	200 μ A~ 10mA	2.5
	3V ~300V	2.5
CVF-80	200 μ A~ 10mA	2.5
	3V ~300V	2.5

Any request that exceed standard range, shunt or multiplier is used for DC meter and current transformer or multiplier is used for AC meter.

定格を超える時は直流計には分流器又は倍率器、交流計には交流器又は変圧器を使用します。

TACHO-METER 回転計	PVF-120 PVF-110 PVF-100 PVF-80	50RPM~5000RPM	WITH EXTERNAL 外部に交流発電機又は GENERATOR 直流発電機を付けます。
--------------------	---	---------------	---

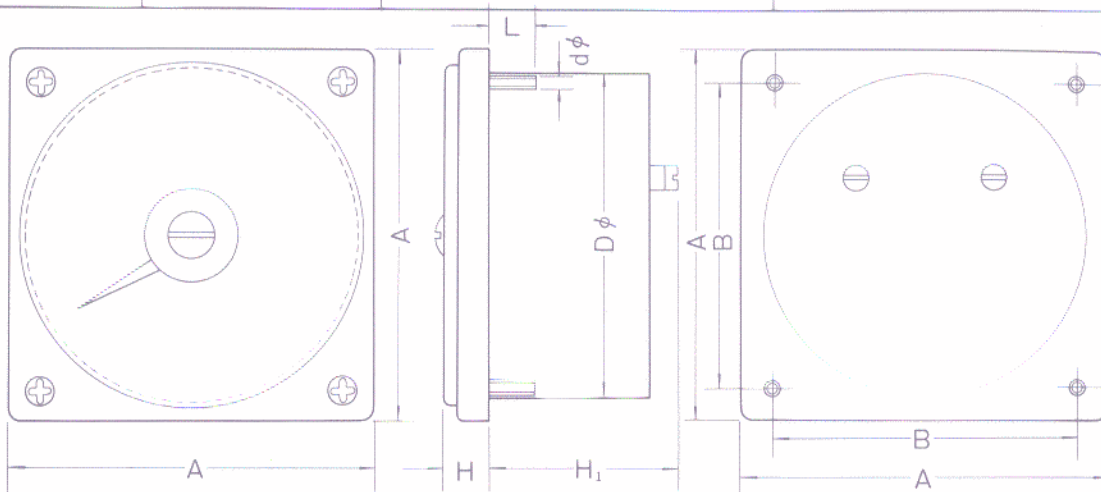

MODEL	A	H	H ₁	B	D ϕ	d ϕ	L
VF-80	80	12	52	64	65	3	10
VF-100	100	16	56	80	85	4	15
VF-110	110	21	72	89	96	5	15
VF-120	120	21	105	100	110	6	15

DIMENSIONS : m/m \pm 0.5



Raymond International Pte Ltd

Registered Office: Block 219 Henderson Road #07-04 Henderson Industrial Park
Singapore 159556 Tel: 2763738 Fax: 2763739
Sales Office: 10 Jalan Besar #03-21 Sim Lim Tower Singapore 208787
Tel: 2920907 2945452 Fax: 2980654
email: rayint@singnet.com.sg
http://www.singnet.com.sg/~rayint

CO., LTD.
MA-223, JAPAN

THE SPECIFICATIONS GIVEN IN THIS CATALOG
ARE SUBJECT TO CHANGE WITHOUT NOTICE

このカタログ記載の仕様は
予告なく変更することがあります